

Installation Guide

Mounting

The (one-output) REE-2102 and (discontinued, four-output) REE-2101 solid-state relays (with zero-crossing AC switching) may be mounted in any position.


To mount:

1. Carefully remove the circuit board from the Snap Track.

⚠ CAUTION

Do NOT bend or flex the circuit board.

2. Mount the Snap Track in the desired location.
3. Replace the circuit board on the track.

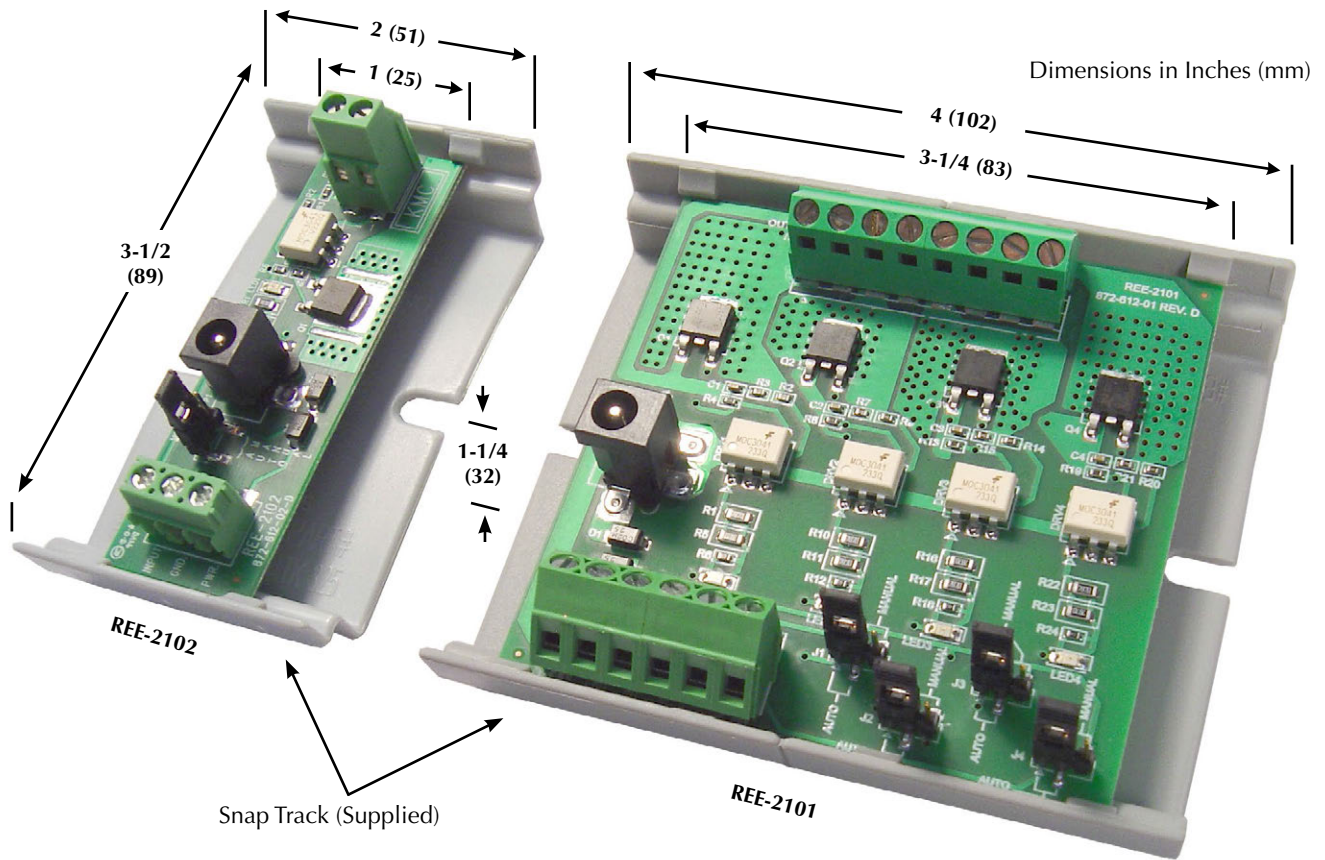


Maintenance

No routine maintenance is required. Each component is designed for dependable, long-term reliability, and performance. Careful installation will also ensure long-term reliability and performance.

More Information

NOTE: For specifications and other information, see the [REE-2102 Data Sheet](#).



Connections and Wiring


1. Remove the "AUTO-MANUAL-OFF" jumper and save.
2. Wire the input(s) common ground to (-) "GND" of the Input terminal block.
3. Wire the individual (+ 10–14 VDC) input(s) to the appropriate terminal(s) of the Input block.

NOTE: If the "MANUAL" mode is to be used, wire power (+ 10–14 VDC) to the "PWR" terminal of the Input terminal block. **This must have the same reference (-) ground as the inputs.**

4. Wire the individual output(s) to the appropriate terminals of the Output terminal block.

NOTE: **Triacs are for switching AC only. The triac output must be in series with the load and transformer output.** Output rating is up to **1 A at 30 VAC**. See the data sheet for additional specifications.

5. Reinsert the jumper in the "AUTO" position.

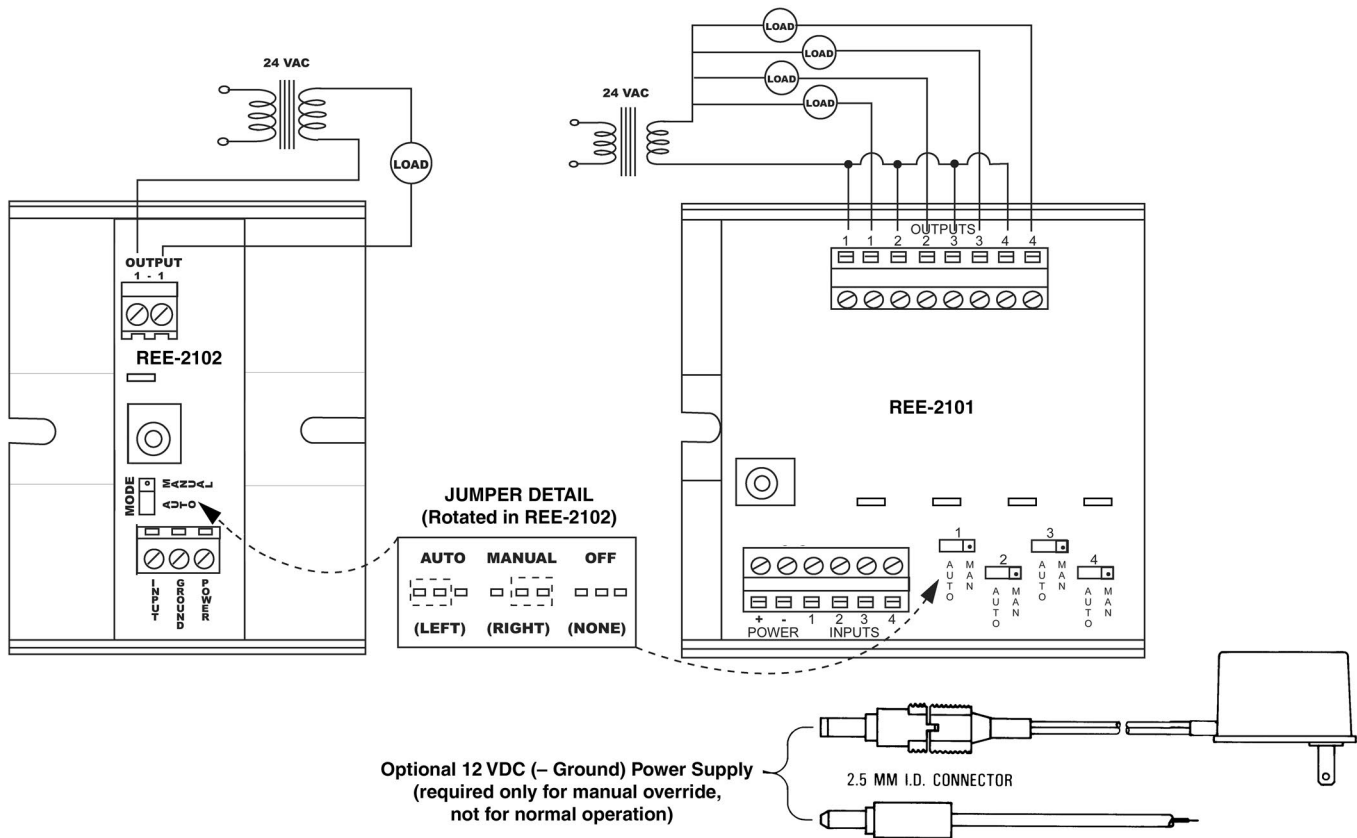

Important Notices

The material in this document is for information purposes only. The contents and the product it describes are subject to change without notice. KMC makes no representations or warranties with respect to this document. In no event shall KMC be liable for any damages, direct or incidental, arising out of or related to the use of this document.

KMC Controls, Inc.
 19476 Industrial Drive
 New Paris, IN 46553
 574.831.5250
www.kmccontrols.com
info@kmccontrols.com