

Description

The KMC CCE-3001 is a single-stage pneumatic-electric relay designed for applications where a single pneumatic signal requires one predetermined air pressure setting to actuate an electric switch.

The CCE-3002 is a two-stage pneumatic-electric relay, and the CCE-3003 is a three-stage pneumatic-electric relay. These relays are designed for applications where a single pneumatic air signal requires two or three predetermined air pressure settings, each actuating its own electric switch.

These relays are UL recognized. Their electrical ratings make them ideal for applications such as starting fan induction terminals or controlling one, two, or three stages of electric heating or refrigeration.

Features

- ◆ Choice of one, two, or three stage units.
- ◆ SPDT switching on each stage.
- ◆ Electrical rating of 25 amps each switch (non-inductive) @ 120/240/277 VAC, 1 HP @ 125 VAC, 2 HP @ 250 VAC, 750 VA pilot duty
- ◆ Fixed differential, 1 to 2 psi nominal (7 to 14 kPa)
- ◆ Setpoint range, 2 to 20 psig (14 to 138 kPa)
- ◆ Models are not position sensitive and may be mounted on surfaces or in bulkheads.
- ◆ UL recognized.

Application

The CCE-3000 series relays are ideal for starting fan induction terminals or controlling one, two, or three stages of electric heating or refrigeration.

Models

CCE-3001	One stage
CCE-3002	Two stage
CCE-3003	Three stage



Still... Made in the U.S.A.






▲ CAUTION

Pneumatic devices must be supplied with clean, dry control air. Any other medium (e.g., oil or moisture contamination) will cause the device to fail.

Details

All dimensions are in inches (mm).

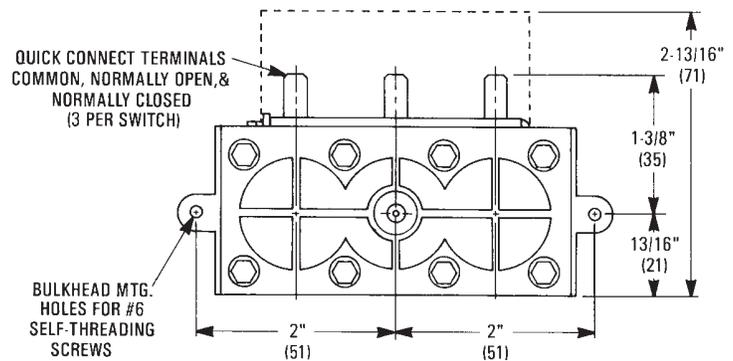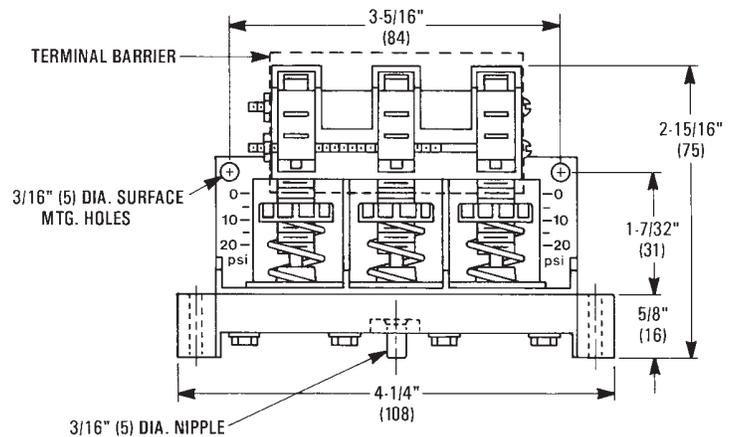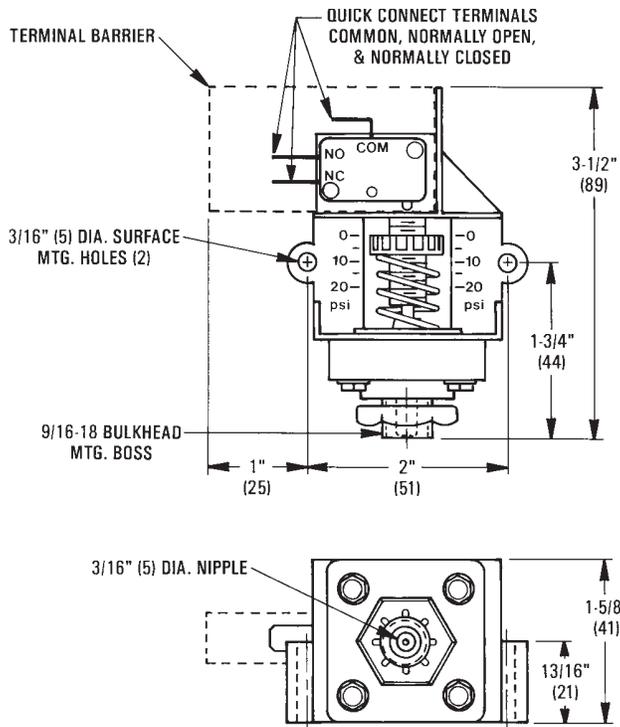

Specifications

Setpoint Range	2 to 20 psi (14 to 138 kPa)
Differential	Fixed differential, 1 to 2 psi nominal (7 to 14 kPa)
Pressure Max.	30 psi (207 kPa)
Connections	
Air	3/16" (5 mm) nipples for 1/4" (6 mm) O.D. polyethylene tubing
Electrical	1/4" quick-connect terminals
Switching Action	SPDT each stage
Electrical Ratings	25 amps each switch (non-inductive) @ 120/240/277 VAC, 1 HP @ 125 VAC, 2 HP @ 250 VAC, 750 VA pilot duty

Weight

CCE-3001	2 oz. (57 grams)
CCE-3002	4.5 oz. (128 grams)
CCE-3003	5 oz. (142 grams)

Material

Housing	Black polycarbonate
Diaphragm	Silicone

Temperature Limits

Operating	40 to 150° F (4 to 60° C)
Shipping	-40 to 150° F (-40 to 60° C)

Approvals

UL recognized
Patent Number 4,855,545 (CEE-3002/3003)

KMC Controls, Inc.

19476 Industrial Drive
New Paris, IN 46553
574.831.5250

www.kmcccontrols.com
info@kmcccontrols.com