

### Description

KMC MCP-1020/02xx series pneumatic damper actuators have an actuation range of two-inches of linear movement. They are designed to position automatic air dampers in pneumatically controlled systems. They may be used for gradual or two-position applications.

Models are available with right-angle bracket mounting and several linkage options.

### Features

- ◆ Gradual or two-position action
- ◆ Post or right-angle mounting bracket
- ◆ Fits 1/2-inch or 3/8-inch damper shafts
- ◆ Variety of spring ranges, mounting brackets, and linkages provide flexibility

### Models

#### MCP-1020 X YYY

#### “X” Spring Ranges and Retracted/Extended Torque (Based on 0 and 20 psi applied, at 90°)

2: 3 to 12 psi; 10/26 in-lb. (21 to 83 kPa; 1/3 N•m)

3: 5 to 10 psi; 16/32 in-lb. (34 to 69 kPa; 2/4 N•m)

5: 8 to 13 psi; 26/22 in-lb. (55 to 90 kPa; 3/2 N•m)

6: 10 to 15 psi; 32/16 in-lb. (69 to 103 kPa; 4/2 N•m)

8: 4 to 8 psi; 13/38 in-lb. (28 to 55 kPa; 1/4 N•m)

**NOTE:** For “bare” MCP-02xx actuators without linkage, see the Accessories and Repair Parts section.

#### “Y” Linkage

308: with ball joint

311: with 1/2" crank arm

312: with 3/8" crank arm



(Crank Arm Shown)

### Accessories and Repair Parts

CMC-1001	Non-metallic positive positioner
VTD-0803	Ball joint, 1/4-20 male x 5/16-24 female for use on end of actuator shafts
VTD-0804	Ball joint, 1/4-20 male x 1/4-20 female for use with VTD-1400 series crank arms
VTD-0903	Right-angle bracket for MCP-1020 series
VTD-1414	3-hole crank arm for 3/8" damper shafts
VTD-1415	3-hole crank arm for 1/2" damper shafts
VTD-1630	Push rod, 5/16 x 6-1/4"
VTD-9422	Replacement actuator diaphragm
MCP-0202	3 to 12 psi actuator, female-end shaft*
MCP-0203	5 to 10 psi actuator, female-end shaft*
MCP-0205	8 to 13 psi actuator, female-end shaft*
MCP-0206	10 to 15 psi actuator, female-end shaft*
MCP-0208	4 to 8 psi actuator, female-end shaft*
MCP-0243	5 to 10 psi actuator, male-end shaft**
MCP-0245	8 to 13 psi actuator, male-end shaft**
MCP-0248	4 to 8 psi actuator, male-end shaft**

\*NOTE: Shafts with **female** ends have 1/4-20 interior threads 5/8-inch deep.


\*\*NOTE: Shafts with **male** ends have (1/16 x 1/16 x 0.235-inch diameter) slotted ends and 5/16-24 exterior threads.

### ▲ CAUTION

**Pneumatic devices must be supplied with clean, dry control air. Any other medium (e.g., oil or moisture contamination) will cause the device to fail.**

## Details

All dimensions are in inches (mm)

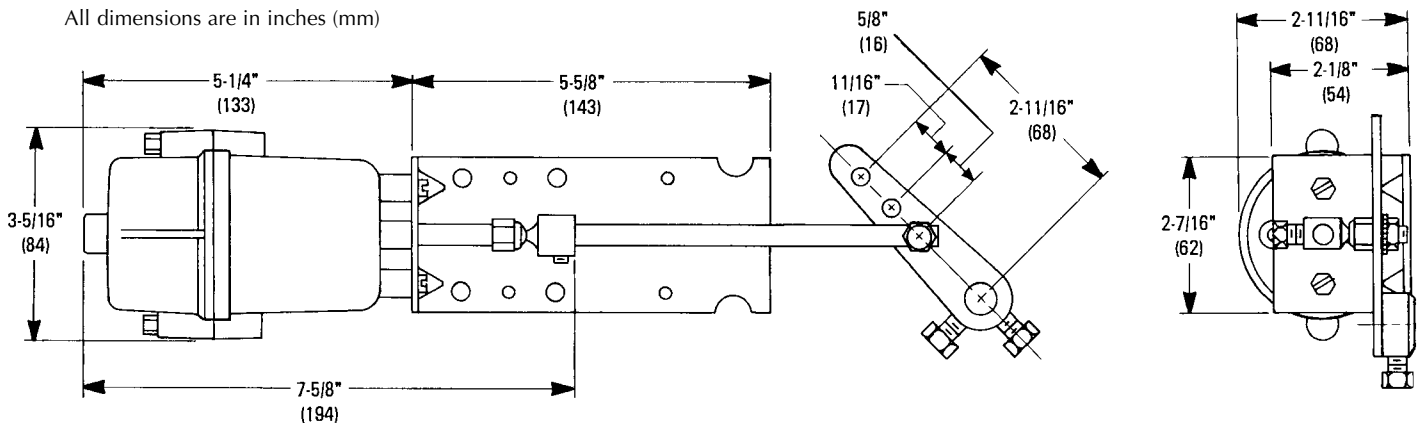

Damper Type	Up to 1000 FPM	1000 to 2500 FPM	2500 to 3000 FPM
Opposed Blades Without Seals	3 in-lb. per square foot	4.5 in-lb. per square foot	6 in-lb. per square foot
Parallel Blades Without Seals	4 in-lb. per square foot	6 in-lb. per square foot	8 in-lb. per square foot
Opposed Blades With Seals	5 in-lb. per square foot	7.5 in-lb. per square foot	10 in-lb. per square foot
Parallel Blades With Seals	7 in-lb. per square foot	10.5 in-lb. per square foot	14 in-lb. per square foot

**NOTE:** Damper manufacturers should provide information about required minimum actuator torque. If that information is not available, this chart provides general guidelines for actuator selection.

## Specifications

**Effective Area** 3 square inches (19 sq. cm)

**Stroke** 2 inches (51 mm)

### Material

Body Glass-filled nylon (Nylatron GS63-13)

Diaphragm Neoprene

Piston Glass-filled nylon (Nylatron GS63-13)

Shaft Cold rolled steel with nickel plating

Bearings Glass-filled nylon (Nylatron GS63-13)

**Supply Connection** 3/16" (5 mm) fitting for 1/4" (6 mm) O.D. polyethylene tubing

### Temperature Limits\*

Operating -20 to 180° F (-29 to 82° C)

Shipping -40 to 180° F (-40 to 82° C)

**\*NOTE:** If the application requires operation near both the maximum temperature and the maximum pressure, install a tubing restraint at the actuator connection.

### Damper Ratings @ 1,000 fpm

Gradual 3 sq. ft. (0.28 sq. m)

Two Position 4.5 sq. ft. (0.42 sq. m)

**Weight** 1.2 lb. (0.54 kg)

### Control Signal Pressure Input\*

0-20 psi (138 kPa) operating,  
30 psi (207 kPa) maximum  
**(see the Note under the Temperature Limits section)**

### KMC Controls, Inc.

19476 Industrial Drive

New Paris, IN 46553

574.831.5250

www.kmcccontrols.com

info@kmcccontrols.com