

Duct-Mounted Carbon Monoxide (CO) Detectors

Description

These detectors are designed to sense and transmit CO (carbon monoxide) gas levels to any compatible electronic analog control or building automation system for the control of ventilation equipment in industrial and commercial applications. They are for use in any industrial or commercial indoor environment where accurate CO detection is required.

The detector uses an electrochemical sensor to monitor the carbon monoxide level and outputs a field-selectable 0–5 VDC, 0–10 VDC, or 4–20 mA signal. The sensing range and output may be scaled to either 0–100, 0–150, 0–300, 0–400 or 0–500 ppm via the on-board menu. A front panel LCD ensures easy setup and operation.

Other features include a backlight for the LCD, a front panel test switch, status indication, an alarm buzzer, and two field-adjustable relays. The test function may also be controlled remotely with a digital input signal.

Features

- ◆ Electrochemical sensing element with range of up to 0–500 ppm with ± 5 ppm or 5% accuracy
- ◆ Powered by either 24 ($\pm 20\%$) VAC or 24 ($\pm 10\%$) VDC source
- ◆ Field-selectable analog output signal
- ◆ Audible alarm
- ◆ Front-panel backlit LCD display, test button, and status indicator
- ◆ Menu-driven configuration set-up and testing
- ◆ On-board relays with field-adjustable trip points (SAE-1112/1162)

Models

SAE-1162 Duct CO sensor with two relays (replaces SAE-1151/1152)



Specifications

Gas Detected	Carbon Monoxide (CO)
Sensing Element	Electrochemical
Range	Selectable 0–100, 0–150, 0–300, 0–400, or 0–500 ppm
Sample Method	Diffusion or flow-through sample tube for duct-mount
Accuracy	± 5 ppm or 5% of reading (whichever is greater) @ 32 to 122° F (0 to 50° C)
Life Expectancy	5 to 7 years in air
Typical Coverage Area	7500 ft ² (700 m ²)
Operation Conditions	–4 to 122° F (–20 to 50° C), 10 to 90% RH, non-condensing, 0.9 to 1.1 atm
Stability	< 5% signal loss/year
Response Time	< 35 seconds for 90% step change
Power Supply	24 ($\pm 20\%$) VAC or 24 ($\pm 10\%$) VDC (non-isolated half-wave rectified)

Consumption 100 mA max. with all options on

Protection Circuitry Reverse voltage protected and output limited

Output Signal Selectable 4–20 mA (sourcing), 0–5 VDC, or 0–10 VDC

Output Drive Capability 450 ohm max. for current output, 10K ohm min. for voltage output

Output Resolution 10 bit PWM (± 0.4 ppm)

Warm-up Time 2 minutes

LCD Display Displays ppm and menu parameters 1 ppm resolution, 35 mm W x 15 mm H (1.4" x 0.6"), alphanumeric two-line eight-character with backlight

Status LED Two color (red/green) on front panel

Test Switch Performs I/O tests, front panel and remote connection

Alarm (Buzzer)
Sound Level 85 db @ 10 feet
Trip Point Programmable 20 to 500 ppm in 10 ppm increments
Delay Programmable 0 to 10 minutes in 1 minute increments

Optional Relay Outputs

Configuration Two form "C" contacts (NO and NC), 5 A @ 250 VAC, 5 A @ 30 VDC, power factor = 1

Trip Point Programmable 25 to 500 ppm in 10 ppm increments

Hysteresis/Deadband Programmable 10 to 100 ppm in 1 ppm increments



Delay Programmable 0 to 10 minutes in 1 ppm increments

Wiring Connections Screw terminal block (14–22 AWG)

Enclosure Ratings ABS, UL94-V, IP65, NEMA 4x

Regulatory Sensor is UL Recognized Component for ANSI/UL-2034, UL-2075, E240671; SASO PCP Registration KSA R-103265; CE and RoHS Compliant

Dimensions

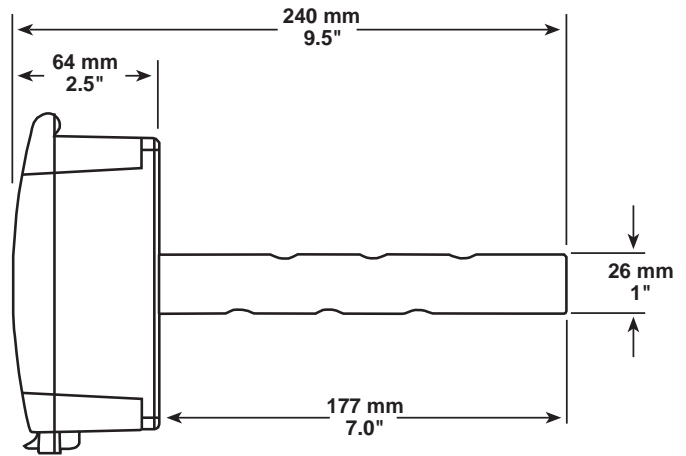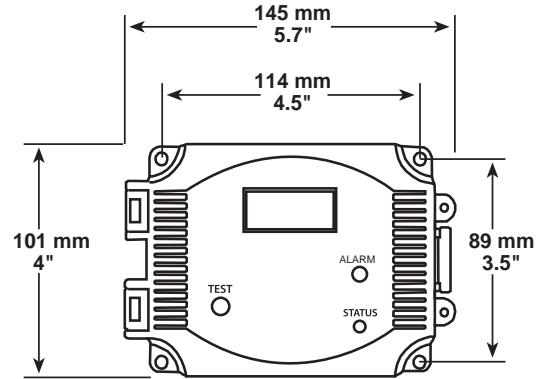

Accessories

XEE-6111-050 Transformer, 120-to-24 VAC, 50 VA, single-hub

XEE-6112-050 Transformer, 120-to-24 VAC, 50 VA, dual-hub

KMC Controls, Inc.

19476 Industrial Drive, New Paris, IN 46553

574.831.5250

www.kmcccontrols.com; info@kmcccontrols.com