


Description and Application

XEE-6000 series transformers provide 24 VAC, with a variety of power rating and primary voltage options. All XEE-6100 series transformers 75 VA and higher and all XEE-6300 series multi-tap transformers have a manual reset circuit breaker on the secondary output.

The transformers provide power for UL Listed or UL Recognized applications. The XEE-6112-100 is approved for use in smoke control systems. All models are CE and RoHS compliant.

The transformers can be mounted using either the mounting base pad or the threaded hub(s).

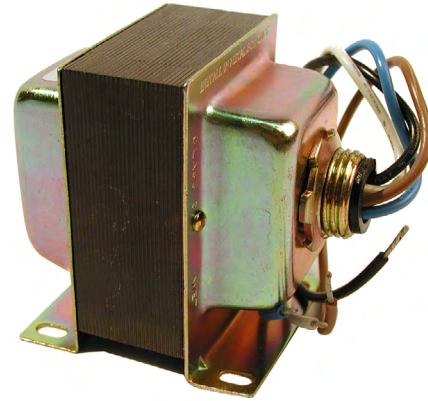

(Single hub shown—specifications and design subject to change without notice)



Models and Specifications

Model Selection Guide							
24 VAC Secondaries—all circuits are non-supervised and all secondaries are power limited							
Model #	Primary Voltage	Power Rating	Circuit Breaker	Threaded Hub	UL*	Dimensions (w/o hubs) (inches/millimeters)	Mounting Hole Dimensions
XEE-6111-040	120 VAC 60 Hz	40 VA	None	Single	R C 2	2.7 W x 2.9 H x 2.2" D (68.6 x 73.7 x 55.9 mm)	2.0 W x 1.8" D (50.8 x 45.7 mm)
XEE-6112-040				Dual	L C 2		
XEE-6111-050		50 VA		Single	R C 2	2.8 W x 2.9 H x 2.2" D (71.1 x 73.7 x 55.9 mm)	2.0 W x 1.8" D (50.8 x 45.7 mm)
XEE-6112-050				Dual	L C 2		
XEE-6211-050	277 VAC 50/60 Hz	50 VA	Included	Single	R C 2	2.8 W x 2.9 H x 2.2" D (71.1 x 73.7 x 55.9 mm)	2.0 W x 1.8" D (50.8 x 45.7 mm)
XEE-6212-050				Dual	L C 2		
XEE-6311-050	120/240/277/480 VAC 50/60 Hz	75 VA		Dual	L C 2	3.5 W x 3.1 H x 2.5" D (88.9 x 78.7 x 63.5 mm)	1.9 W x 2.0" D (48.3 x 50.8 mm)
XEE-6111-075	120 VAC 60 Hz			Single	R C 2	3.9 W x 3.1 H x 2.5" D (99.1 x 78.7 x 63.5 mm)	2.3 W x 2.0" D (58.4 x 50.8 mm)
XEE-6112-075		Dual	L C 2	3.9 W x 3.1 H x 2.5" D (99.1 x 78.7 x 63.5 mm)	2.3 W x 2.0" D (58.4 x 50.8 mm)		
XEE-6311-075	120/208/240/480 VAC 50/60 Hz	96 VA	Single	R C 2	3.9 W x 3.0 H x 2.5" D (99.1 x 76.2 x 63.5 mm)	2.3 W x 2.0" D (58.4 x 50.8 mm)	
XEE-6111-100	120 VAC 60 Hz		Single	R C 2	4.1 W x 3.1 H x 2.5" D (104.1 x 78.7 x 63.5 mm)	2.5 W x 2.0" D (63.5 x 50.8 mm)	
XEE-6112-100**			Dual	L C 2 UUKL**			
XEE-6311-100	120/240/277/480 VAC 50/60 Hz		Dual	L C 2	4.3 W x 3.1 H x 2.5" D (109.2 x 78.7 x 63.5 mm)	2.6 W x 2.0" D (66.1 x 50.8 mm)	

***UL Certification** R C 2 = UL Recognized Class 2
L C 2 = UL Listed Class 2
UUKL** = Approved for use in smoke control systems

Other Approvals
Wiring


CE and RoHS compliant
18 AWG leads, 7.5 to 9.5" (191 to 241 mm) long, stripped and tinned

Configuration


Split bobbin design, steel end bells

Weight


2.4 to 5.3 lbs. (1.09 to 2.4 kg)




**XEE-6111-040 (Single Hub)
and
XEE-6112-040 (Dual Hub)**




**XEE-6111-050 (Single Hub)
and
XEE-6112-050 (Dual Hub)**




**XEE-6211-050 (Single Hub)
and
XEE-6212-050 (Dual Hub)**

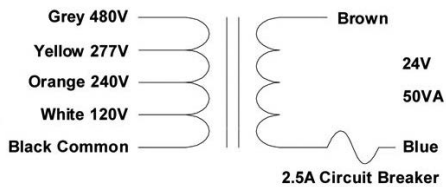


XEE-6311-050 (Dual Hub)

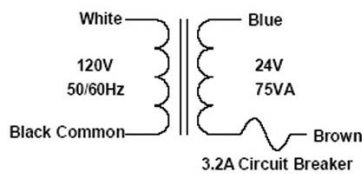


**XEE-6111-075 (Single Hub)
and
XEE-6112-075 (Dual Hub)**

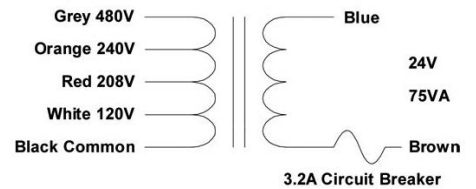

XEE-6311-075 (Single Hub)

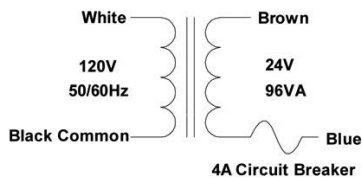

**XEE-6111-100 (Single Hub)
and
XEE-6112-100** (Dual Hub)**

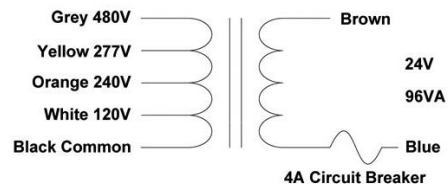

XEE-6311-100 (Dual Hub)

**NOTE: For information about smoke control applications, see Smoke Control Manuals available on the KMC [web site](#) (linked to models [XEE-6112-100](#)).

KMC Controls, Inc.

19476 Industrial Drive

New Paris, IN 46553

574.831.5250

www.kmcccontrols.com

info@kmcccontrols.com