



# Q8/B8 SERIES

## Combustible Gas Transmitter

The Q8/B8 Series of Explosion Proof Gas Detectors are used in applications that require a rugged enclosure that meets the Class 1 Division 2 requirements. Each unit comes standard with an integral clock, digital display of concentration, relay status, STEL, TWA, and peak daily values of the gas being detected. A three color backlight will flash depending on the level of alarm for operator safety. Setup and calibration is accomplished through non-intrusive magnetic switches that allow for programming of all parameters. A remote sensor option is available for toxic and combustible gases and should be used in applications where the main unit can be mounted at 3 to 6 feet off of the floor with the remote sensor being at the ceiling or floor levels to monitor the gas concentrations depending on the gas being monitored. Sensor types include electrochemical and

catalytic bead sensors to meet the demand and performance requirements for particular industries. The Q8 uses Optomux and Modbus RS-485 protocol, 4-20 mA, 1-5 or 2-10 VDC while the B8 uses BACnet™ MSTP(RS485) protocol to communicate directly with a BAS. The Q8/B8 also has three (3) SPDT Form 1C relays that are user adjustable. Calibration gases and 0.2 to 1 liter/minute flow limiting gas regulators are not available through ACI and should be purchased through your local gas supply company or companies such as Portagas® (Praxair®, Inc.) or Mesa Specialty Gases®. Refer to all applicable Federal, State, Provincial and Local Health and Safety laws and regulations before using these products. The Q8/B8-GENL can be ordered to monitor specific combustible gases such as Gasoline, Ethanol, Diesel or Jet fuel. Contact ACI for specific gases.

**Applications:** Mechanical Rooms, Warehouses, Refrigeration Plants, Industrial Plants, Process Monitoring, Leak Detection, Parking Garages, Auto/Truck Maintenance Facilities, Oil and Gas Industry

**The Q8/B8 Series Gas Transmitters are covered by ACI's Two (2) Year Limited Warranty against defects in material and workmanship from the date of shipment with the exception of the Sensor Modules (Electrochemical/Toxic: Six Months and Catalytic/Combustible: One Year). The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, [www.workaci.com](http://www.workaci.com).**

### PRODUCT SPECIFICATIONS


<b>Supply Voltage [Q8]:</b>	<b>VDC Supply Voltage:</b> 24 VDC nominal (+18 to 30 VDC) (Q8: AC Power must not be grounded) <b>VAC Supply Voltage:</b> 24 VAC nominal (+15 to 24 VAC, AC Power must not be grounded)
<b>Supply Voltage [B8]:</b>	<b>VDC Supply Voltage:</b> 24 VDC nominal (+18 to 30 VDC) (AC Power can be grounded or non-grounded) <b>VAC Supply Voltage:</b> 24 VAC nominal (+15 to 24 VAC, AC Power must not be grounded)
<b>Fuse Protection:</b>	0.750A Polyswitch; (Automatically resets after fault is cleared & power to circuit is removed)
<b>Supply Current   Power Consumption:</b>	0.3A maximum   8.4 VA
<b>Analog Output Signals (Q8 Only):</b>	4-20 mA, 1-5 VDC or 2-10 VDC (4-Wire; Power, Power Ground, Output Signal, Output Signal Common)
<b>Load Impedance:</b>	<b>4-20 mA Output:</b> 600 Ohms maximum   <b>1-5 VDC or 2-10 VDC:</b> 3000 Ohms minimum
<b>Communication Protocols:</b>	<b>Q8 Communication Protocols:</b> RS-485 Modbus RTU / OptoMux (Proprietary QEL Controller Protocol) <b>B8 Communication Protocols:</b> RS-485 Serial BACnet™ MS/TP (Master and Slave; Default: Master)
<b>Q8 Communication Baud Rates:</b>	1200, 2400, 4800, 9600, 14400, 19200, 28800, 38400, 57600, 76800 Bits/Second (Default: 4800)
<b>B8 Communication Baud Rates:</b>	9600, 19200, 38400, 76800 Bits/Second (Default: 38400)
<b>Factory Calibration Range:</b>	See Gas Sensor Selection & Specification Table on back of data sheet
<b>Display:</b>	LCD Graphic Display with backlight (Displays TWA, STEL and Peak Daily Value)
<b>Keypad:</b>	Three (Non-Intrusive) Magnetic Switches
<b>Relays   Contact Type   Relay Contact Ratings:</b>	Three, SPDT (Form 1C) Dry Contacts rated 1.0A max. @ 30 VDC or 0.3A max. @ 125 VAC (Resistive Load)
<b>Status LEDs:</b>	Two Green LED's (Tx/Rx Communication Status), Three Red LED's (Relays 1, 2, & 3 Status)
<b>Factory Calibrated Range:</b>	See Gas Sensor Selection & Specification Table on back of data sheet
<b>Sensor Warm-Up Time:</b>	24 Hours (Allow 24 hours before calibrating sensor after initial installation)
<b>Sensor Type:</b>	See Sensor Technology Type in Table on back of Product Data Sheet
<b>Sensor Gas Types:</b>	Combustible and Toxic Gases/Oxygen Sensor
<b>Sensor Life Expectancy:</b>	<b>Toxic/Electrochemical Sensors:</b> 2 to 3 Years, typical Oxygen/Hydrogen: 18 months, typical <b>Combustible/Catalytic:</b> 3 to 5 years, typical
<b>Unit Shelf Life:</b>	<b>Toxic:</b> 6 Months from date of purchase (Must be installed and operational) <b>Combustible:</b> 1 Year from Date of Purchase (Must be installed and operational)
<b>Replacement Sensor:</b>	See User's Manual or Contact ACI
<b>Recommended Maintenance:</b>	<b>Combustible Sensors:</b> Accuracy & Bump test every 3 months or as required by Code <b>Toxic Sensors:</b> Accuracy & Bump test every 6 months or as required by Code
<b>Enclosure Specifications (Type, Material Type, Flammability, NEMA/IP Rating, Explosion Proof):</b>	Industrial Connection Head; Cast Aluminum Epoxy Coated NEMA 4X (IP66), Division 1 Division 2, ANSI/ISA 12.22.01 Class I Zone 1 AEx d II C, IP66 Zone 1 CSA E60079-1 Ex d II C, Class I, Zone 1, IP 66 CSA C22.2 No. 30 Class I, Groups A, B, C, D; Class II Groups E, F, G; Class III
<b>Conduit Connection:</b>	Two 3/4" NPT Threaded Openings
<b>Operating Temperature   Humidity:</b>	See Sensor Selection & Specification Table on back of data sheet   5 to 95% RH, non-condensing
<b>Operating Atmospheric Pressure:</b>	14.696 psi (1.0132 bar) +/- 10%
<b>Recommended Storage Temperature/Humidity:</b>	32 to 68°F (0 to 20°C)   5 to 95% RH, Non-Condensing
<b>Wiring Connections   Wire Size:</b>	Dependable Screw Terminal Blocks, 16 to 24 AWG (0.51 to 1.30 mm) Shielded Twisted Pair
<b>Communications Cable:</b>	Belden 9841 or Equivalent, 120 Ohms Input Impedance
<b>Terminal Block Torque Rating:</b>	0.37 ft-lb (0.502 Nm) Nominal
<b>Coverage Area   Mounting Height:</b>	See Gas Sensor Selection & Specification Table on back of data sheet
<b>Approvals:</b>	RoHS, CSA- Class 4828-02 inspected to C22.2 No. 30 and No. 142 (CSA File #: 088890_0_000)
<b>Product Weight:</b>	4.35 lbs. (1.973 kg)
<b>Product Dimensions (L x W x H):</b>	7.48" (190 mm) x 5.71" (145 mm) x 5.12" (130 mm)

**Note:** When installed @ > 3000' above sea level, the gas transmitters must be verified for accuracy & re-calibrated as needed after installation





**DIMENSIONAL DRAWING**

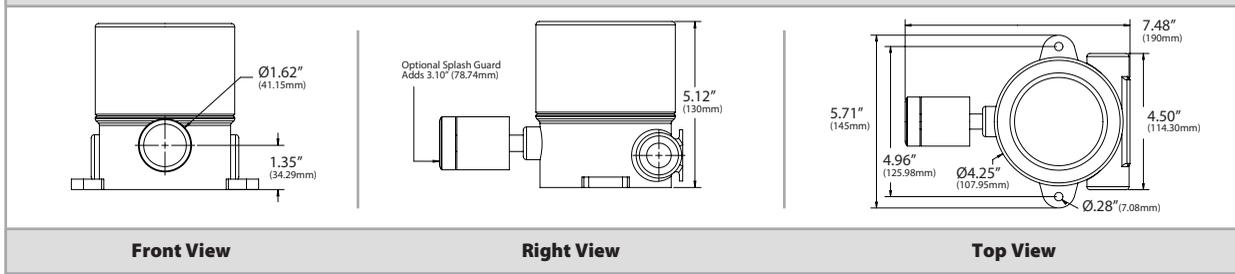

**SENSOR SELECTION AND SPECIFICATION**

Gas Type	Gas Span Code	Combustible	Toxic	100% LEL <sup>1</sup> in % By Vol.	Measurement Range	Operating Temp °F (°C)	Square Feet ft <sup>2</sup> (m <sup>2</sup> )	Radius ft (m)	Mounting Height
Acetone	CH3CO-100L	•		2.6%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Ammonia	NH3-100P		•	N/A	0-100 PPM	-22 to 122 (-30 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Ammonia	NH3-1000P		•	N/A	0-1000 PPM	-22 to 122 (-30 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Arsine	ASH3-1P		•	N/A	0-1 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Benzene	C6H6-100L	•		1.3%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Iso-Butane	C4H10-100L	•		1.8%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Butanol, n-Butane	BUTAN-100L	•		1.9%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5 <sup>2</sup> )	40 (12.2)	Low <sup>2</sup>
Carbon Monoxide	CO-250P		•	N/A	0-250 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid <sup>2</sup>
Carbon Monoxide	CO-1000P		•	N/A	0-1000 PPM	-4 to 122 (-20 to 50)	7500 (696.7 <sup>2</sup> )	49 (14.9)	Mid <sup>2</sup>
Chlorine	CL2-5P		•	N/A	0-5 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Chlorine Dioxide	CLO2-2P		•	N/A	0-2 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Diborane	B2H6-2P		•	N/A	0-2 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Mid <sup>2</sup>
Ethylene	C2H4-100L	•		2.7%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Mid <sup>2</sup>
Germane	GEH4-2P		•	N/A	0-2 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Hydrogen	H2-1000P		•	N/A	0-1000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Hydrogen	H2-2000P		•	N/A	0-2000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Hydrogen	H2-100L	•		4.0%	0-100% LEL	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Hydrogen Bromide	HBR-30P		•	N/A	0-30 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Hydrogen Chloride	HCL-30P		•	N/A	0-30 PPM	-4 to 122 (-20 to -50)	5000 (464.5)	40 (12.2)	Mid <sup>2</sup>
Hydrogen Cyanide	HCN-50P		•	N/A	0-50 PPM	-4 to 122 (-20 to -50)	5000 (464.5)	40 (12.2)	Mid <sup>2</sup>
Hydrogen Sulphide	H2S-25P		•	N/A	0-25 PPM	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Hydrogen Sulphide	H2S-100P		•	N/A	0-100 PPM	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Methane	CH4-100L	•		5.0%	0-100% LEL	-40 to 122 (-40 to 50)	7500 (696.7)	49 (14.9)	High <sup>2</sup>
Methanol	CH3OH-100L	•		6.7%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Nitric Oxide	NO-100P		•	N/A	0-100 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid <sup>2</sup>
Nitrogen Dioxide	NO2-10P		•	N/A	0-10 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Low <sup>2</sup>
Oxygen <sup>3</sup>	O2-25V		•	N/A	0-25% by Vol	-40 to 122 (-40 to 50)	7500 (696.7)	40 (12.2)	Mid <sup>2</sup>
Ozone	O3-1P		•	N/A	0-1 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	High <sup>2</sup>
Iso-Pentane	CSH12-100L	•		1.4%	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Phosphine	PH3-1P		•	N/A	0-1 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Phosphine	PH3-5P		•	N/A	0-5 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Propane	C3H8-100L	•		2.1%	0-100% LEL	-40 to 122 (-40 to 50)	7500 (696.7)	49 (14.9)	Low <sup>2</sup>
Silane	SiH4-50P		•	N/A	0-50 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Mid <sup>2</sup>
Sulphur Dioxide	SO2-6P		•	N/A	0-6 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low <sup>2</sup>
Combustibles <sup>1</sup>	GENL-100L	•		<b>Specify Gas</b>	0-100% LEL	-40 to 122 (-40 to 50)	5000 (464.5)	40 (12.2)	Gas Dependent

Acetaldehyde, Benzene, Carbon Disulfide, Dioxane, Ethane, Ethanol, Ethylbenze, Gasoline, Heptane, Hexane, Ipa, Isopropanol, Jet Fuel, Kerosene, Naphtha, Styrene, Toluene, Voc's, Xylenes

**Note 1:** Lower Explosive Limit (LEL) | **Note 2:** Low = 0.5 to 1.5' (0.15 to 0.46m) above floor | Mid = 4.0 to 6.0' (1.20 to 1.83m) above floor | High = 0.5 to 1.5' (0.15 to 0.46m) below ceiling  
**Note 3:** Oxygen sensors monitor oxygen depletion caused by numerous gases including: Nitrous Oxide, Helium, Nitrogen, Sulfur hexafluoride, Argon, Xenon, Neon.





CUSTOM ORDERING		Model # Example: <b>B8</b> <b>CO-250P</b> <b>O</b> <b>X</b>	MODEL #
		A. B. C. D. E.	
<b>A. Sensor Series</b> <i>Select One (1)</i>	<b>Q8</b> = Toxic/Combustible Gas Transmitter Series with Analog/Relay/Communicating Output Signals and Display  <b>B8</b> = Toxic/Combustible MS/TP BACnet™ Gas Detection Transmitter with Relays and LCD Display		
<b>B. Gas Span Code</b>	<b>Enter a "Gas Span Code" from the Sensor Selection &amp; Specification Table</b>		
<b>C. Enclosure</b> <i>Select One (1)</i>	<b>O</b> = Standard Wall Mount Enclosure   <b>R</b> = Remote Mount Sensor		
<b>D. Revision</b> <i>No Selection Required</i>	<b>X</b> = Factory Provided <span style="font-size: 2em;">→</span>		<b>X</b>
<b>E. For GENL Sensors</b>	<b>Enter a "Gas Type" from the Sensor Selection &amp; Specification Table</b> (See Combustibles)		

ACCESSORIES ORDERING			Model # Example: <b>79030-103</b> -OR- <b>126566</b>
Model #	Item #	Description	
<b>79030-103</b>	126566	Q8 Combustible Calibration Adapter	

ACCESSORIES ORDERING		HORN STROBE		Model # Example: <b>FSIG-SLM500A</b> -OR- <b>136476</b>
Model #	Item #	Description		
<b>FSIG-SLM500A</b>	136476	Streamline Horn and Strobe (Amber)		
<b>FSIG-SLM500B</b>	142976	Streamline Horn and Strobe (Blue)		
<b>FSIG-SLM500G</b>	143013	Streamline Horn and Strobe (Green)		
<b>FSIG-SLM500R</b>	143132	Streamline Horn and Strobe (Red)		

ACCESSORIES ORDERING		MOUNTING BASE		Model # Example: <b>FSIG-SLMBW-012-024GY</b> -OR- <b>136477</b>
Model #	Item #	Description		
<b>FSIG-SLMBD-012-024GY</b>	142977	Deep Base for FSIG-SLM500 Series; Gray		
<b>FSIG-SLMBW-012-024GY</b>	136477	Wall Mount Base for FSIG-SLM500 Series; Gray		

**Note:** See Strobe & Alarm Data Sheet if required

